

# SN-AC1101 Access Controller




#### **Key Features**

- Supports one door access control
- TCP/IP communication
- Supports storing 42,000 register cards and 200,000 record capacity
- Wiegand interface supports W26/W34/W66


#### **Specification**

Network	
Wired Network	10 M/100 M self-adaptive
Interface	
Network Interface	1
Door Control	1
Card Readers	2
Exit Button	1
Door Sensor Interface	1
Relay	1
Capacity	
Card Capacity	42,000 (Can be extended)
Event Capacity	200,000 (Can be extended)
Protocol	
Wiegand Protocol	Wiegand 26/34/66
Wiegand Distance	100m (328.08 ft.), Suggest 80m (262.48 ft.)
Internet Protocol	TCP/IP
Communication Distance	100m (328.08 ft.), Suggest 80m (262.48 ft.)
General	
Power Supply	240 VAC
Power Consumption	$\leq$ 3.6 W (standby), $\leq$ 36 W (working)
Output Voltage	12 VDC
Operating Temperature	-20 °C ~ 60 °C (-4°F ~ 140 °F)
Operating Humidity	10% to 90% (no condensing)
Operating Environment	Indoor
Dimensions	277 × 232 × 70mm (10.91" × 9.13" × 2.76")
Net Weight	1.94 Kg (4.28 Lbs)

### **Dimensions(mm)**



## **Application**

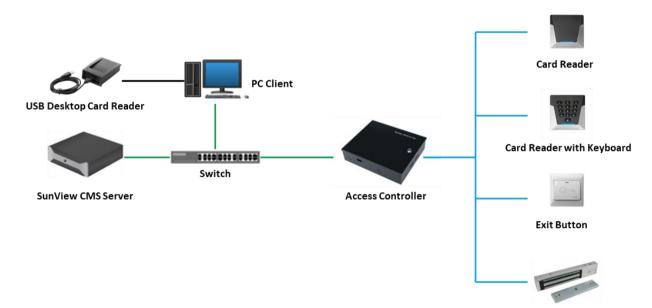

Lock

©2023 Sunell all rights reserved. Design and specifications are subject to change without notice.