



SN-GL3201

Bolt Electric Lock




Key Features

- Electric bolt, stainless steel, support thrust of 800kg
- 500 thousand times of locking operation
- Power supply can be 12VDC or 24VDC, (default voltage is 12VDC)
- Suitable for wooden door, glass door, metal door, farmed door, hollow frame door and fireproof door
- Power off unlocking
- The delay duration can be set: 0/3/6s

Specification

General	
Input Voltage	12 VDC +10%
Working Current	950mA (Startup Current), 90mA (Standby)
Working Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	0 to 95% (Relative Humidity)
Suitable Door	Wooden door, glass door, metal door, framed door, hollow frame door, frameless door
Secure	Power off for unlocking
Induction Distance	< 10mm (0.39")
Lifetime	500 Thousand Times of Locking Operation
Bolt Performance	Stainless steel, Support Thrust of 800kg
Dimension of lock body (L × W × H)	204 × 34× 38 mm (8.03 × 1.34 × 1.5")
Dimension of armature plate (L × W × H)	90 × 25 × 2 mm (3.54 × 0.98 × 0.07")
Dimension of Bolt	16mm×16mm (0.63×0.63")
Weight	0.7 Kg (1.54 Lbs)

Dimensions(mm)

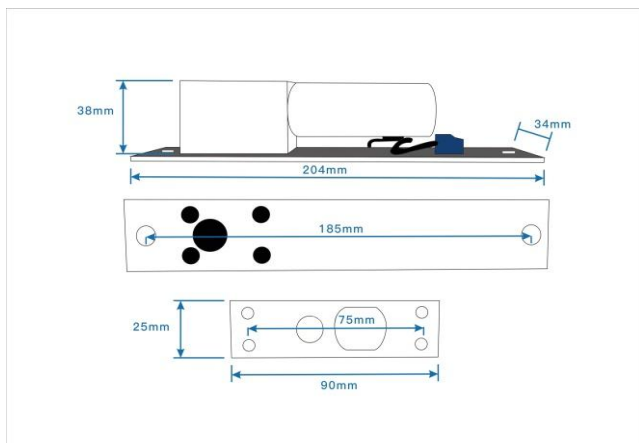

Application

